





HOW TO JUMP START YOUR CAR




1. POSITION CARS CLOSE TOGETHER SO THEY'RE BONNET TO BONNET, WITHOUT TOUCHING.

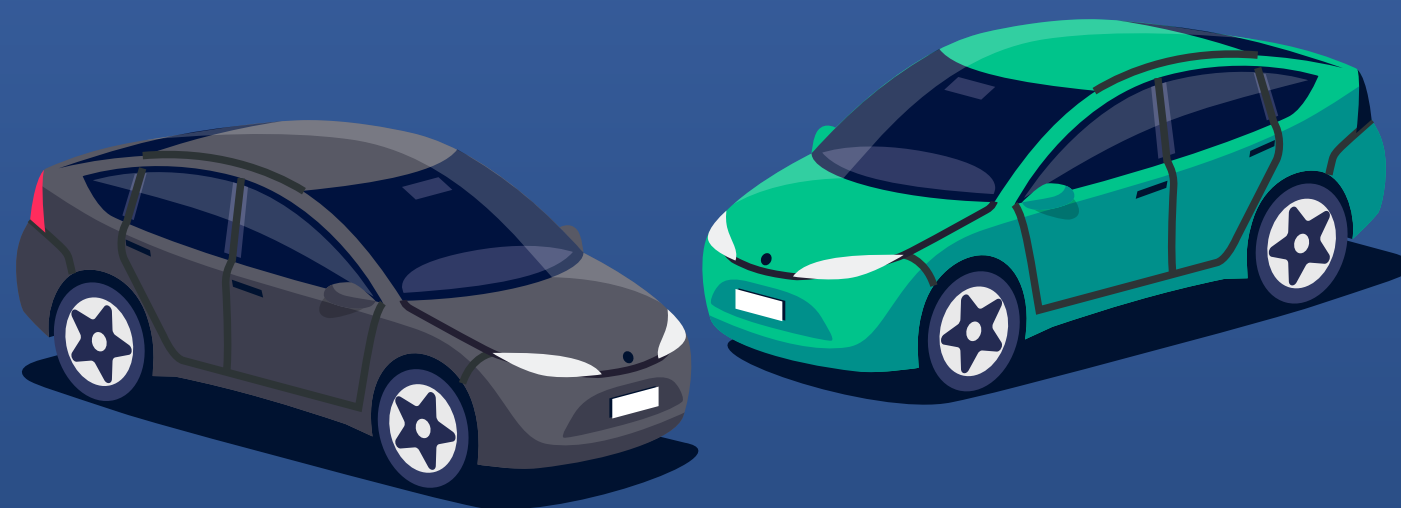


2. CHECK THAT BOTH CARS ARE IN NEUTRAL WITH THE HANDBRAKES ON.

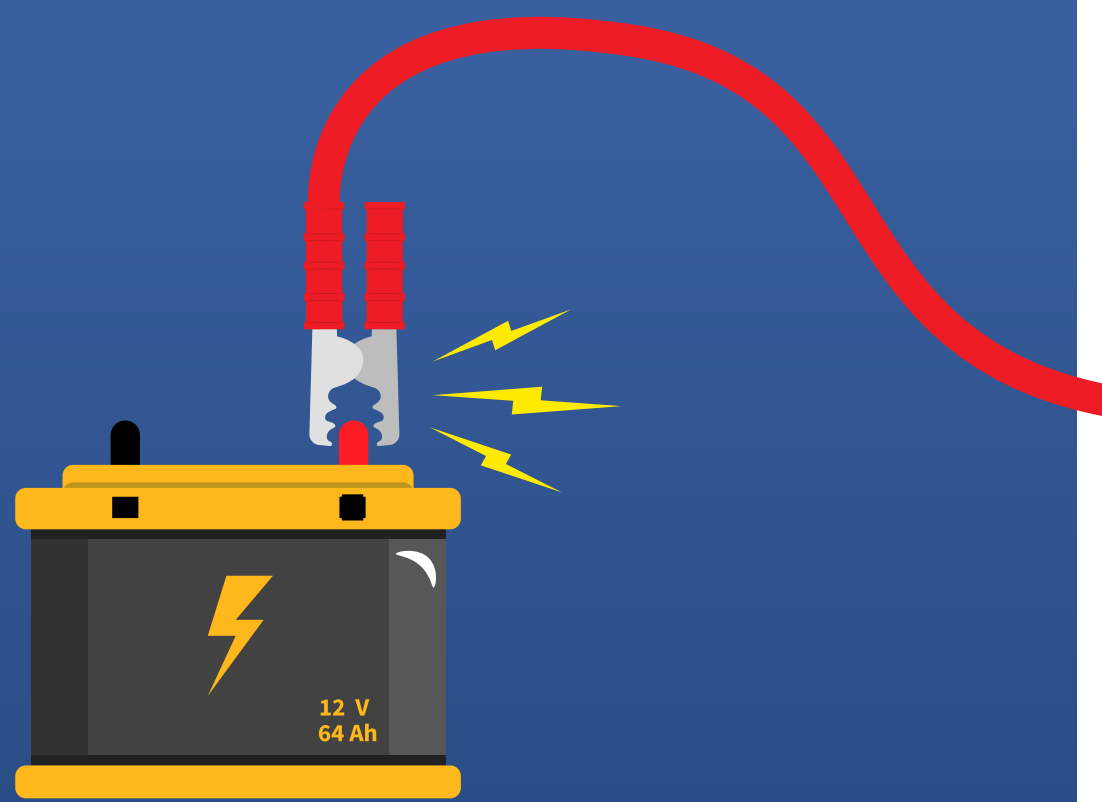

3. ATTACH THE RED JUMP LEAD TO THE POSITIVE TERMINAL OF THE FLAT BATTERY, THEN TO THE POSITIVE OF THE CHARGED BATTERY.

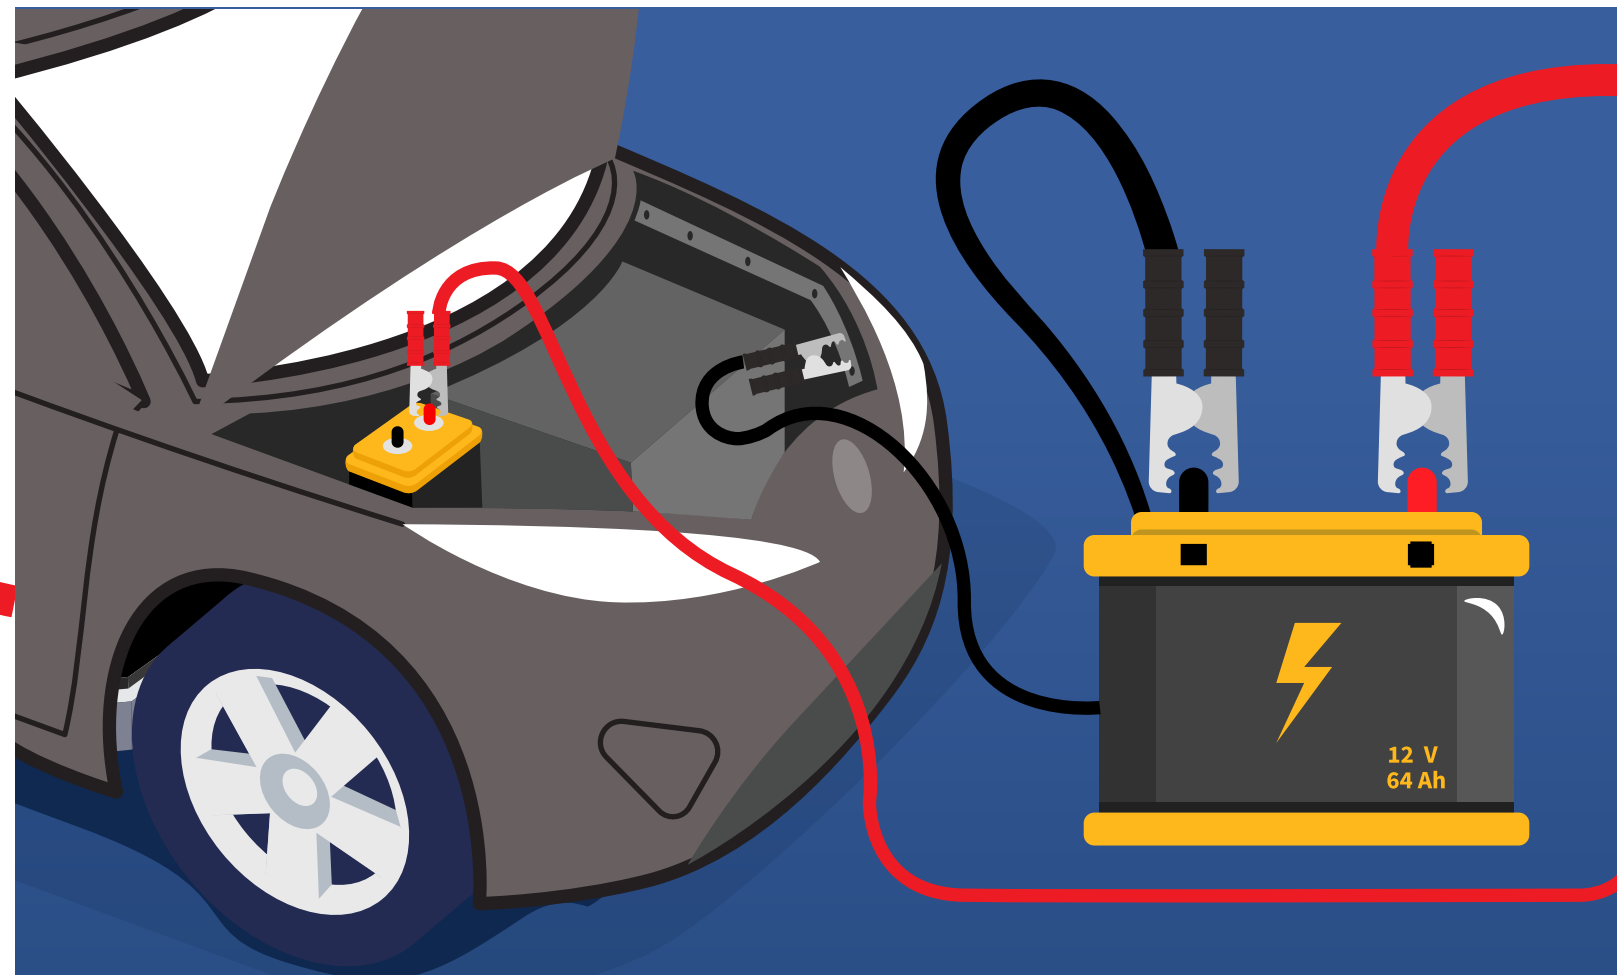


4. ATTACH THE BLACK JUMP LEAD TO THE NEGATIVE TERMINAL OF THE CHARGED BATTERY, THEN CLIP THE OTHER END TO ANY UNPAINTED METAL BRACKET ON THE CAR WITH THE FLAT BATTERY.

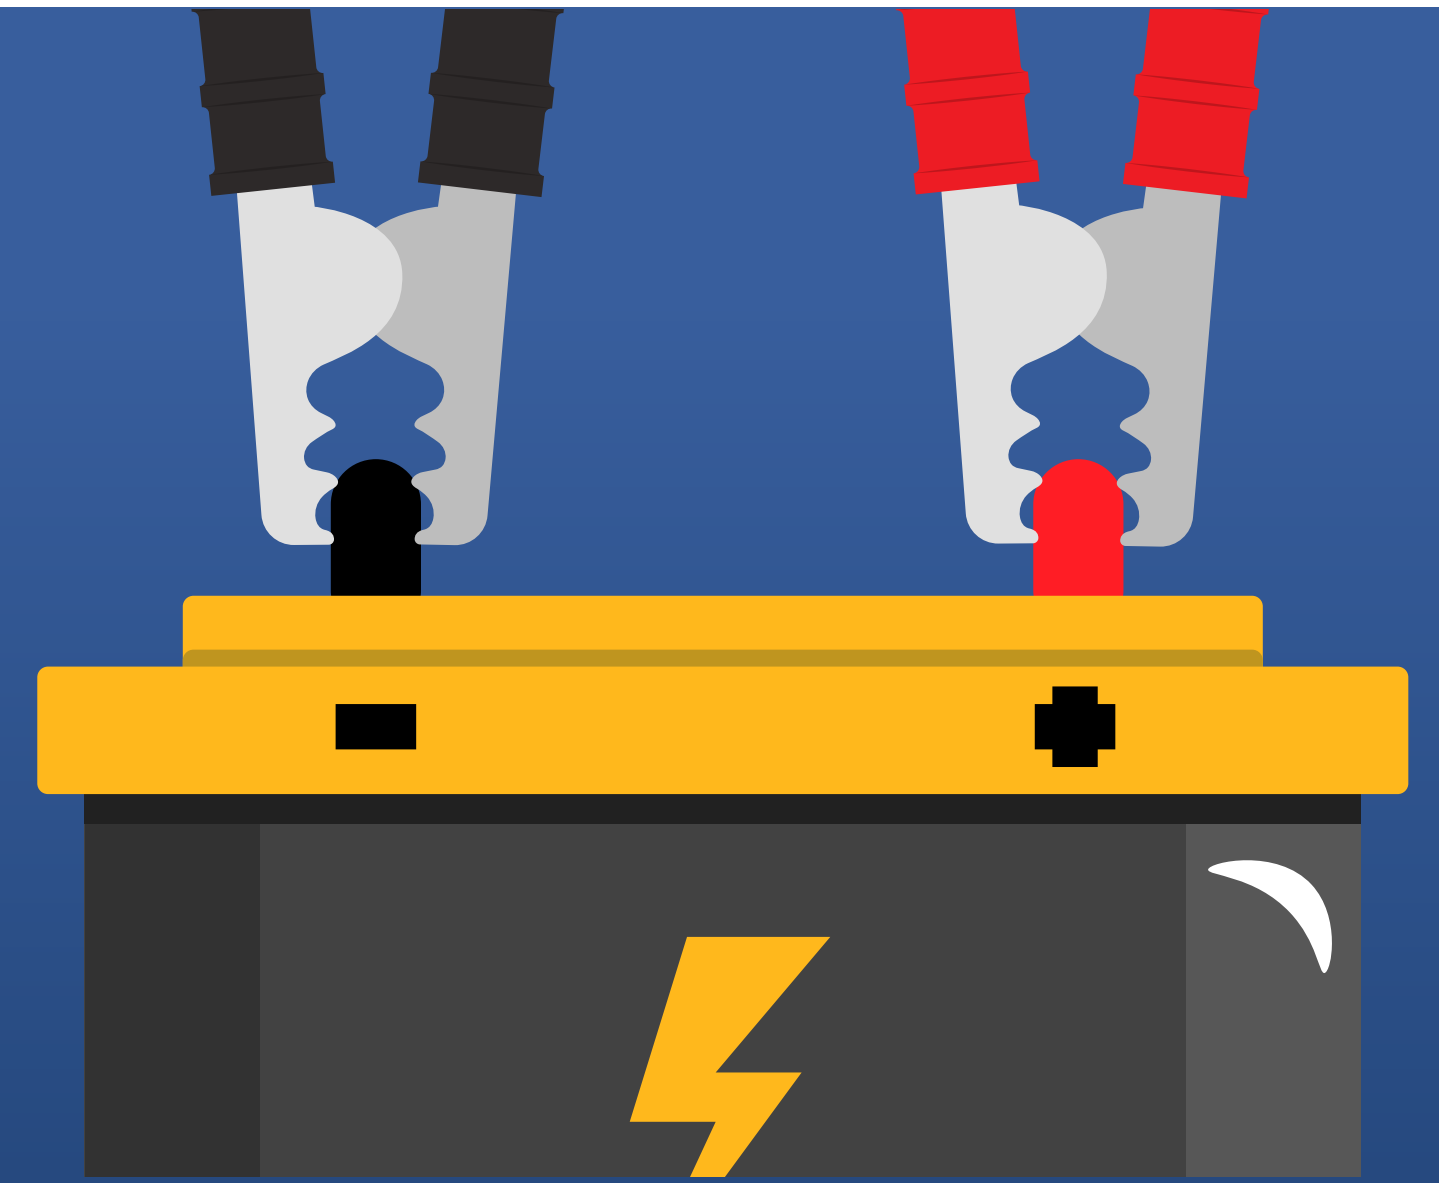


5. ENSURE ALL LEADS ARE SECURE, THEN WAIT 3-5 MINUTES.




6. START THE ENGINE OF THE CAR WITH THE CHARGED BATTERY. LET IT RUN FOR A MINUTE.

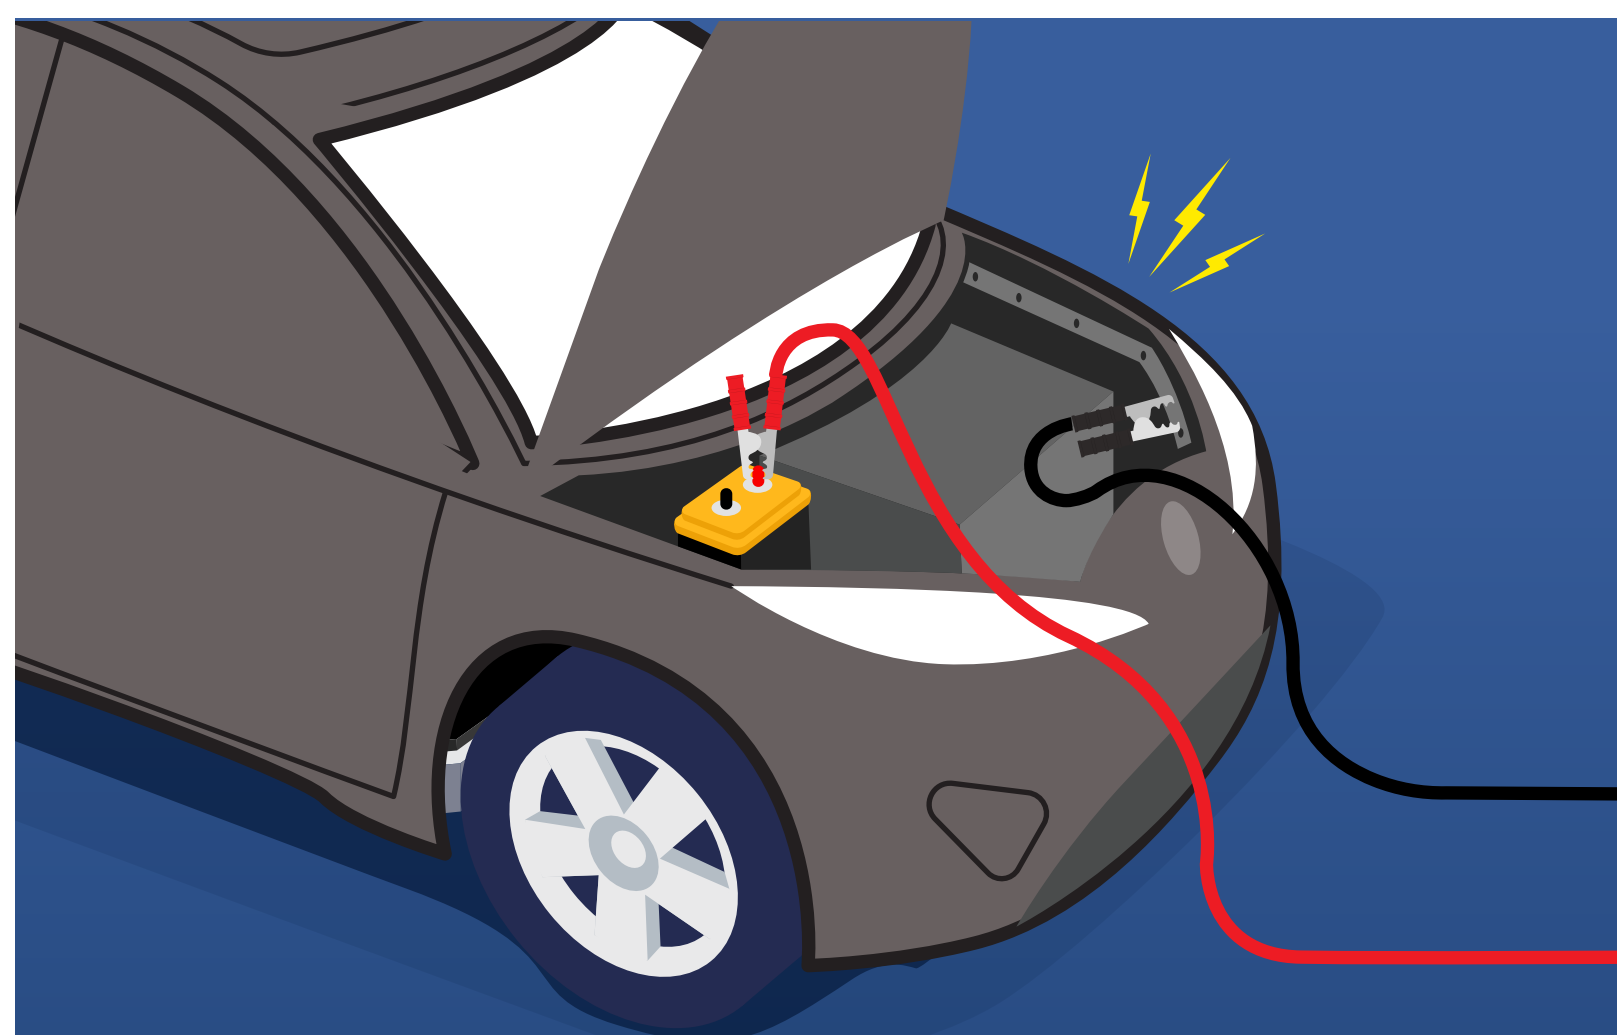

7. TRY TO START THE FLAT BATTERY CAR. IF IT DOESN'T WORK, WAIT A FEW MORE MINUTES.

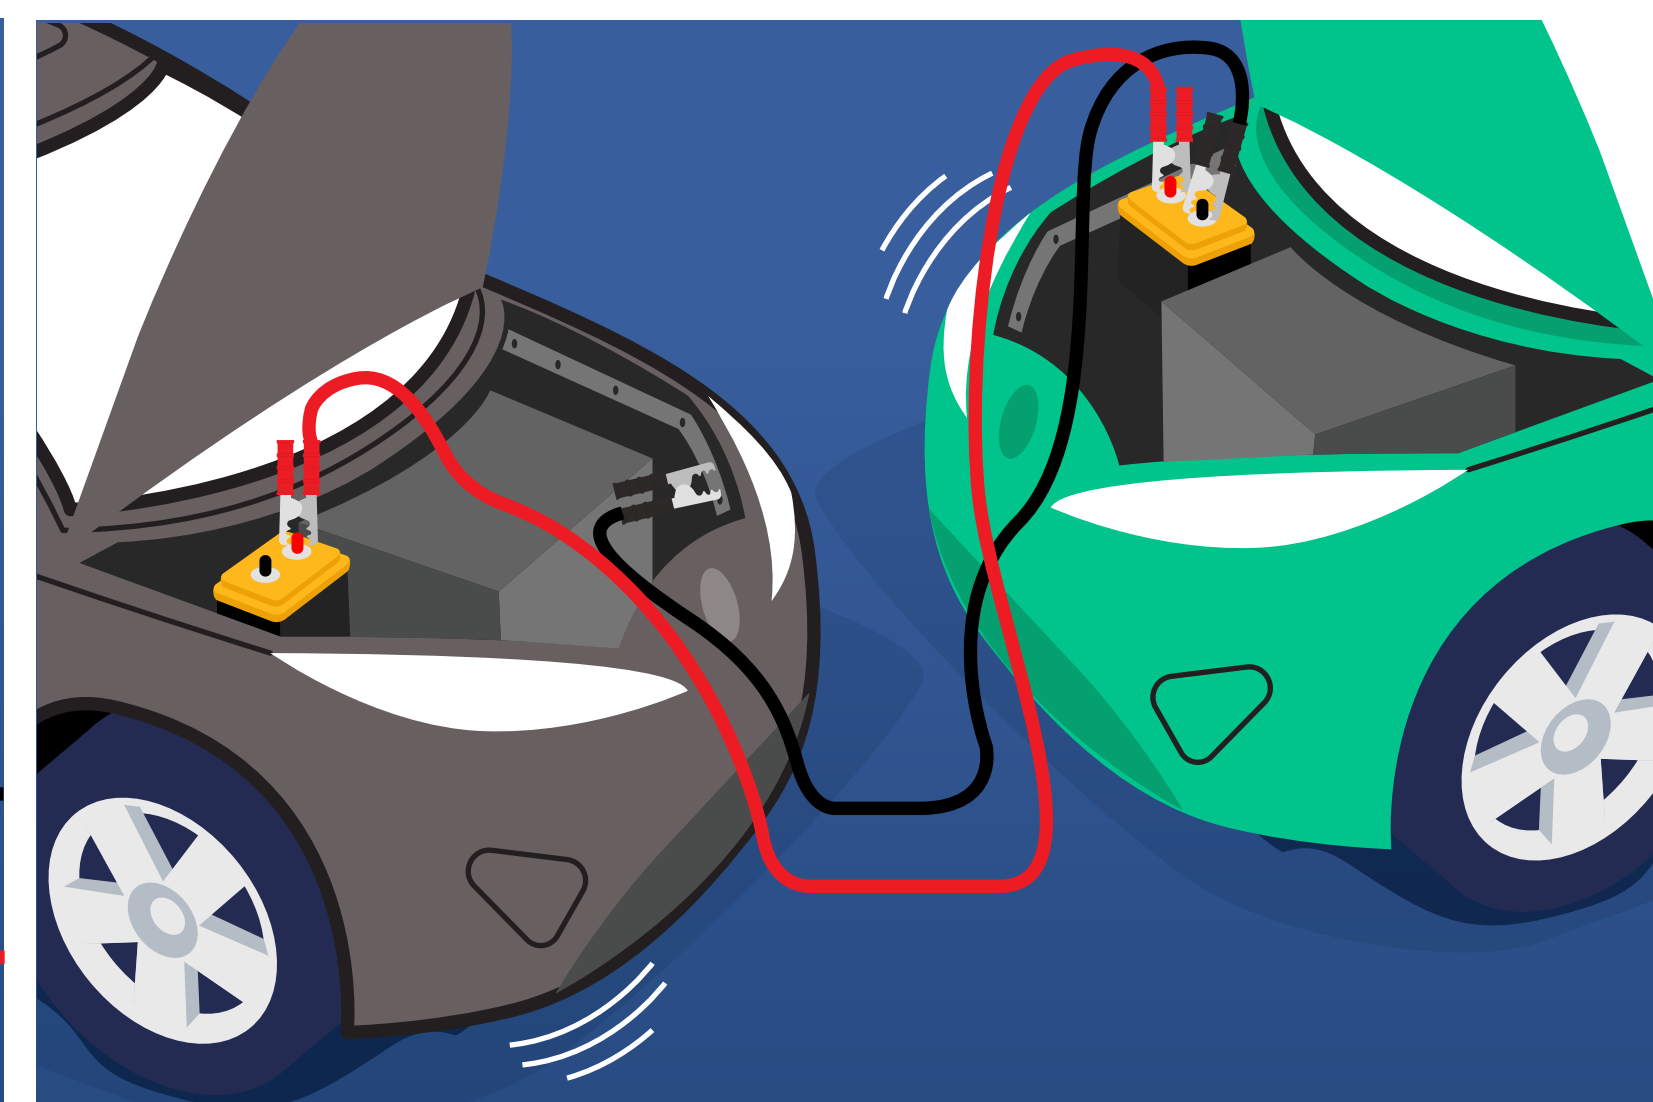

8. ONCE BOTH CARS ARE RUNNING, LEAVE THEM ON FOR 10 MINUTES. STAY NEARBY.

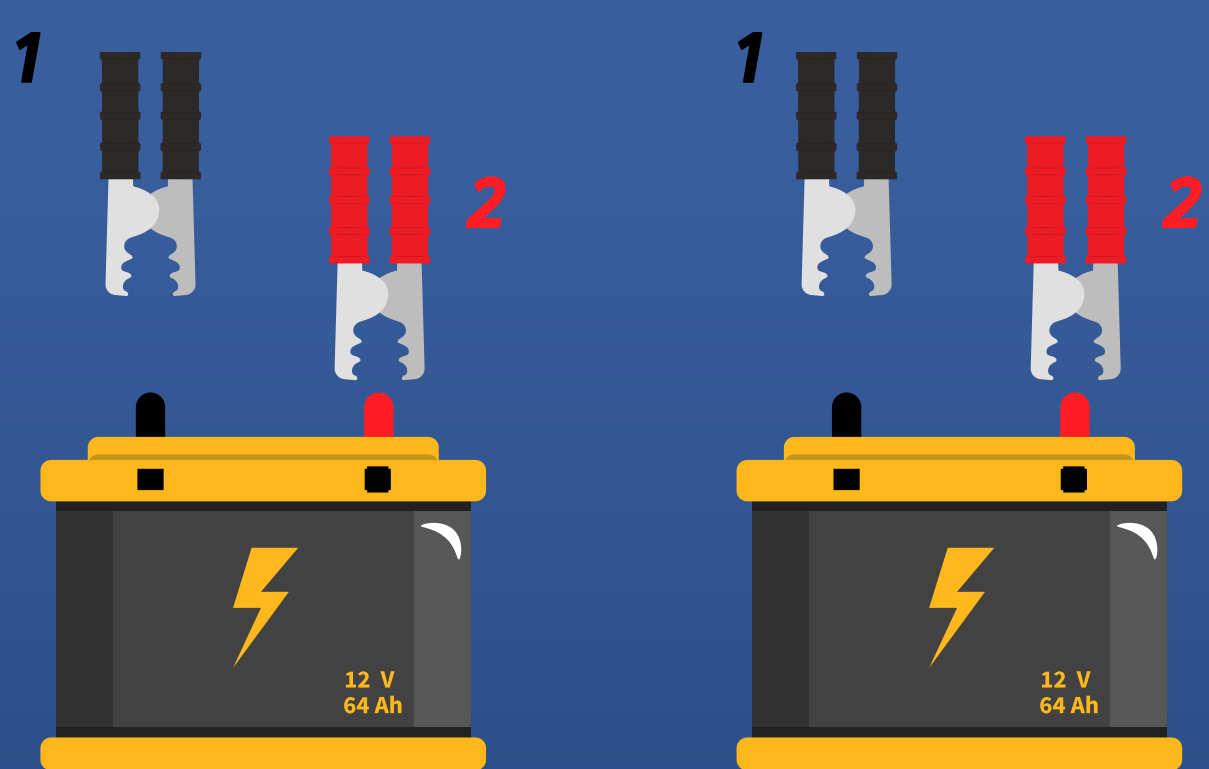

9. WITH THE ENGINES ON, FIRST REMOVE THE BLACK LEAD FROM THE FLAT BATTERY, THEN THE OTHER END OF THE BLACK LEAD. THEN REMOVE THE RED LEAD FROM BOTH CARS.



10. KEEP THE CAR RUNNING FOR AROUND 20 MINUTES, THEN DRIVE FOR 30+ MINUTES.

DRIVE AWAY HAPPY EVERY TIME